

Tree Survey Report

Site Address

Rear of 5 Stillions Close
Alton
GU34 2RX

Report No.

G&TS/SR/0357

Site Surveyed by

Steven Lamb

Report Prepared by


Simon Rogers

Approved by

Stuart Campbell FdSc (Arb) MArborA

Date

20th July 2026

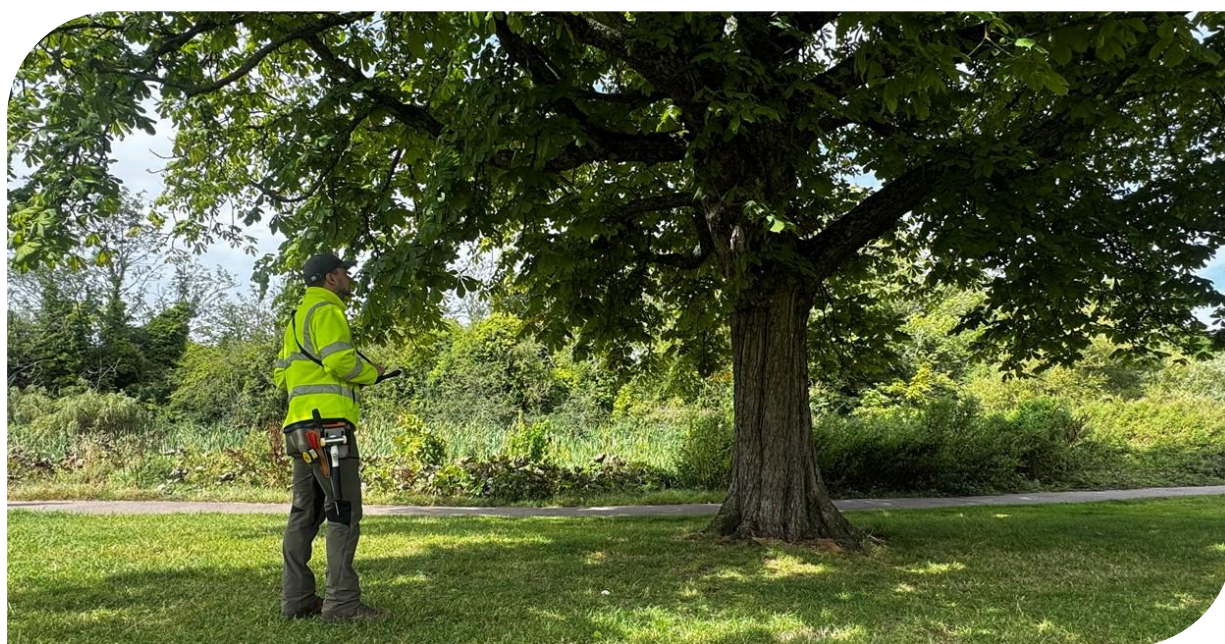

Contents

1. Introduction	3
1.1 Assignment	3
1.2 Documents and Information Provided	3
1.3 Scope of This Report	3
1.4 Limitations of Use	3
2. Site Visit Observations	3
3. Identification and Location of Trees	3
4. Observations	4
5. Works Priority	4
6. Recommendations	5
7. Future Considerations	6
8. Other Considerations	6
8.1 Trees subject to statutory controls	6
9. Reference Material	6
10. Survey Certification	7
11. Appendix 1: Glossary of Arboricultural Terminology	8
12. Appendices 2 & 3:	13
• Tree Schedule – Priority Works	13
• Tree Location Plan	13



1. Introduction

1.1 Assignment

Gristwood & Toms (a Nurture Group Company) has been instructed by Alton Town Council to carry out a survey of the trees within the grounds of **Rear of 5 Stillions Cl, Alton GU34 2RX**. Where appropriate, we are to make recommendations on the immediate and future management in the interest of safety.

1.2 Documents and Information Provided

No documents or information was provided

1.3 Scope of This Report

This report solely relates to the trees that Steven Lamb surveyed on 29th May 2026.

1.4 Limitations of Use

The content and format of this report are for the exclusive use of the addressee in dealing with this site. It may not be sold, lent, hired out or divulged to any third party not directly involved in this site without the written consent of Gristwood & Toms.

2. Site Visit Observations

An unaccompanied site visit of Rear of 5 Stillions Cl, Alton GU34 2RX was carried out by Steven Lamb on 29th May 2026. The trees were inspected using the Visual Tree Assessment (VTA) methodology described by Claus Mattheck and Helge Breloer in *The Body Language of Trees* (1994). Stationery Office Books (TSO) and endorsed by the Arboricultural Association (LANTRA Professional Tree Inspection course, 2007).

All observations were from ground level without detailed investigations. All dimensions were estimated unless otherwise indicated. The weather at the time of the survey was warm and sunny with good visibility.

3. Identification and Location of Trees

The survey schedule lists the species, based on visual observation, giving the scientific and common names of the tree. The tree survey schedule is included in the appendices of this report.



4. Observations

There were **36 features** in total inspected on the site. Of the 36 features inspected, **35 features** were identified as individual trees, and **1 feature** was identified as a tree group.

Of the **35 individual trees** inspected on the site, **0 trees** were identified to be in a good condition. **33 trees** were identified to be in a fair condition. **2 trees** were identified to be in a poor condition.

Of the **1 tree group** inspected on the site, **1 tree group** was identified to be in a fair condition.

5. Works Priority

Urgent – Public Safety

Works are urgently required to make safe a tree that has been identified as dead/structurally unsound and is putting public safety at risk.

These works are recommended to be completed within **1 month**.

High Priority

Works may be required for the following reasons:

To keep the highways infrastructure (e.g., streetlights and road signs) clear of obstructions and maintain sight lines for vehicles or pedestrians.

To abate an actionable nuisance (e.g., branches damaging windows and gutters).

When an inspection has identified visible decay, fungal brackets, or other structural defects.

To reduce a significant overhang of tree branches into an adjacent property.

When previous maintenance regimes have determined that future works are of the same specification for that specimen (e.g., pollarding and crown reduction).

These works are recommended to be completed within **12 months**.

Low Priority

Works may be carried out on a cyclic pruning regime to provide long term health and safety benefits to the tree.

These works are recommended to be completed within **24 months**.

No Action Required

Where a tree's health and condition indicate no works are required at the time of inspection.



The presence of any defect will increase the chances of failure. Each species has its own profile of defects. Some factors that must be considered include the species growth habit, tree

condition, branch attachments, resistance to decay, condition of anchoring roots, cultural or maintenance history and previous damage.

Failure Potential	Urgent – Public Safety	High Priority	Low Priority	No Action Required
Works Within 1 Month	0			
Works Within 12 Months		19		
Works Within 24 Months			0	
No Action Required				17

6. Recommendations

Recommendations have been made for tree works in line with sound Arboricultural management and it is recommended that the works are undertaken within the suggested timescales.

There are **0 trees** identified that require **Urgent – Public Safety** tree work. It is recommended that the works should be completed within the next **1 month**.

There are **19 trees** identified that require **High Priority** tree work. It is recommended that the works should be completed within the next **12 months**.

There are **0 trees** identified that require **Low Priority** tree work. It is recommended that the works should be completed within the next **24 months**.

There are **16 trees**, and **1 tree group** were identified as **No Action Required**.

All recommended tree works are to be carried out in accordance with BS 3998:2010 – Tree Work Recommendations.

Nesting Birds: Any recommended tree works should be undertaken outside the bird nesting season (1st March to 31st August); however, it should be assumed that birds will nest before and after this period. A wildlife assessment should be carried out immediately prior to the commencement of works. This will inform on whether there are nesting birds and if works on a specific tree can proceed without harming any birds.



Bats: Prior to commencing aerial works or felling, the arborists should carry out a visual assessment for the potential for bat habitation. If there is a possibility of bats using a tree for roosting, the Commissioning Officer (Agent) should be contacted and works to the tree suspended until an ecologist has visited the site to provide advice on whether works can proceed without any risk of harm to bats.

7. Future Considerations

Trees are living organisms whose health and condition can change rapidly; therefore, the health, condition and safety of trees should be checked on a regular basis.

When the recommended tree work has been carried out, it is suggested that an inspection regime is introduced so that the subject trees are inspected on a **24-monthly cycle**, unless otherwise indicated within Appendix 2: Tree Schedule – Priority Works of this report.

8. Other Considerations

8.1 Trees subject to statutory controls

If any trees are covered by a Tree Preservation Order or located in a conservation area it will be necessary to consult the local authority before any tree work can be carried out. The works specified above are necessary for reasonable management and should be acceptable to the local authority.

9. Reference Material

Wilson, P. (n.d.). *Tree Terms - Arboricultural definitions*. [online] A-Z of tree terms: A companion to British arboriculture. Available at: <http://www.treeterms.co.uk/>.

Johnson, O. and More, D. (2006). *Collins tree guide*. London: Collins.

C Mattheck (2007). *Updated field guide for visual tree assessment*. Karlsruhe: Forschungszentrum Karlsruhe.

Claus Mattheck, Helge Breloer and Britain., G. (1994). *The Body Language of Trees*. Stationery Office Books (TSO).

Lonsdale, D. (1999). *Principles of Tree Hazard Assessment and Management*. Stationery Office Books (TSO).

Strouts, R.G., Winter, T.G. and Great Britain. Forestry Commission (2004). *Diagnosis of ill-health in trees*. Norwich: TSO.

Guy, W. (2014). *Tree pests and diseases: an arborists' field guide*. Stonehouse, Gloucestershire: Arboricultural Association.



Watson, G., Green, T. and Arboricultural Association (2011). Fungi on trees: an arborists' field guide. Stonehouse, Gloucestershire: Arboricultural Association, Cop.

British Standards Institution (2010). BS 3998:2010 Tree Work – Recommendations. London: BSI.

10. Survey Certification

Site Surveyed By:

Steve Lamb

Report Completed By:

Simon Rogers

Report Approved By:

Stuart Campbell FdSc (Arb) MArborA.

Date:

20th July 2026



11. Appendix 1: Glossary of Arboricultural Terminology

Ash Dieback	Ash dieback is a disease that affects ash trees (<i>Fraxinus spp.</i>), caused by a fungus called <i>Hymenoscyphus fraxineus</i> . The fungus blocks water transportation within the tree, leading to bark lesions, leaf loss and dieback of the crown.
Asymmetrical Crown	Unbalanced crown often resulting from storm damage, uneven pruning work or the proximity of neighbouring trees.
Bark exudate	A flow of viscous liquid (bleeding from bark) exuded onto the surface of the bark from the underlying tissues consisting of largely of <i>gum</i> , <i>resin kino</i> or <i>latex</i> depending on the species of tree. Bark exudate indicates the inner bark is dead, dying, or injured owing to disease, physical injury, root damage etc.
Branch Stub	That part of a decapitated or broken branch protruding beyond the branch collar, sometimes called a snag. It is considered not good pruning practice to leave stubs. Branch stubs may give rise to unwanted epicormic shoots or may lack vigour and subsequently die back, making them prone to decay.
Brown rot	Form of decay where cellulose is degraded, while lignin is only modified.
Buttress root	Roots that emerge from the base of the tree stem, normally large and well developed and rapidly forming the connection between the stem and the transport roots.
Cambium	A thin layer of actively growing and dividing cells, located between the xylem (sapwood) and the bark of a plant, the part responsible for radial growth of a tree stem or branch.
Canker	A localised area of dead bark and cambium on a stem or branch, caused by fungal or bacterial organisms, characterised by wound wood development on the periphery. This may be annual or perennial.
Co-dominant stem/ trunk	Forked branches or trunks of nearly the same size in diameter and lacking a normal branch union.
Compartmentalisation	The physiological process that creates the chemical and mechanical boundaries that act to limit the spread of disease and decay organisms.
Conservation area	Designated areas of architectural or historical interest, in which there are special procedures for planning applications. Additionally, tree works cannot generally, be undertaken without prior notification to the relevant local planning authority.



Crown lifting	Crown lift the removal of the lowest branches, usually to a given height. It allows more residual light and greater clearance underneath for vehicles etc.
Crown reduction	The reduction of a tree's height or spread while preserving the tree's natural shape.
Crown thinning	The removal of some of the density of a tree's crown, usually 5-25% allowing more light through its canopy and reducing wind resistance.
Deadwood	Deadwood is often present within the crown or on the stems of trees. It may be an indication of ill health; however, it may also indicate growth processes. If a target beneath the tree, deadwood may fall and cause injury or damage and should be removed, otherwise deadwood can remain intact for conservation purposes (insects, fungi, birds etc), also, the removal of dead branches from a tree's canopy, usually of a specified size (in diameter).
Decay	Progressive deterioration of organic tissues, usually caused by fungal or bacterial organisms, resulting in loss of cell structure, strength, and function. In wood, the loss of structural strength.
Epicormic growth	Fast growing, weakly attached shoots/branches that often grow as a response to stress factors upon a tree or branch removal.
Formative pruning	The trimming of a tree to remove weaknesses and irregularities which may lead to problems. The formative pruning operation is aimed at reducing the potential for future weaknesses or problems within the tree's crown.
Girdling Root	In woody plants, a root that grows across the buttress, or across other roots, eventually causing constriction of the radial growth.
Hazard Beam	An upwardly curved branch in which strong internal stresses may occur without the compensatory formation of extra wood (longitudinal splitting may occur in some cases).
Horse Chestnut Bleeding Canker	Formally attributed to <i>Phytophthora</i> spp. thought to be responsible for 5-10% of cases but following an upsurge of the disease it is now mostly attributed to the bacterium ' <i>Pseudomonas syringae</i> pv. <i>Aesculi</i> '. Horse Chestnut Bleeding Canker kills the bark, resulting in conspicuous bleeding that dries into a black bark exudate. Branches and trees, including young trees, can be completely girdled resulting in the death of the tree.
Included Bark	Bark that becomes embedded in a crotch between branch and trunk or between co-dominant stems, found in narrow or tight crotches, and causes a weak structure.
Massaria	<i>Massaria</i> (<i>Splanchnonema platani</i>) is a disease of London Plane (<i>Platanus x hispanica</i> , also known as <i>Platanus x acerifolia</i>) which causes large lesions on the upper surfaces of major branches and branch dieback and can cause branches to break off the tree and fall.



Monolith	Retaining a standing stem for wildlife habitat or conservation purposes at any given height. The height a monolith is left at is often determined by the proximity to any given target to be less than the falling distance to that target.
Oak Processionary Moth	A cause of defoliation, especially of oaks and trees of other species growing next to defoliated oaks. Eggs are laid within the outer crown of the host tree in late summer and hatch the following spring. The larvae feed on the leaves and often move head-to-tail in a procession, hence their common name. They make communal nests (sometimes called tents) out of silken thread in which they shelter when not feeding. Nests may be spun on the underside of a branch or on the trunk. The hairs of (later stage) larvae are a serious irritant and may provoke an allergic reaction. They easily break off, or are shed when the caterpillars are disturbed, to be dispersed in the air, as well as their abandoned nests, should be treated with extreme caution. Every year oaks in public places are surveyed for OPM and treated with insecticide. Private tree owners may be responsible for their own survey and control, potentially enforced by a plant health notice or the powers of the local authority.
Occluding tissue	The general term of wood, cambium and bark that develop around the site of a wound on a woody plant.
Phytophthora spp.	Phytophthora is a genus of water molds that cause devastating diseases in trees, affecting roots, stems, and foliage. Several species, like <i>Phytophthora ramorum</i> (which causes Ramorum disease), <i>Phytophthora lateralis</i> , and <i>Phytophthora kernoviae</i> , are known to be highly destructive. These pathogens can lead to root rot, stem cankers, dieback, and ultimately, death of the host tree.
Picus Tomography	PiCUS testing is a non-invasive method of determining the extent of decay in trees. The PiCUS Sonic Tomograph is an instrument that can detect decay in trees by taking readings of the velocity of soundwaves through the trunk/stem from several sensors, installed with small nails around the trunk, which are each struck to pass sound through the trunk/stem. These readings are used to create a tomogram, which shows the consistency of the wood within the tree and identifies area/s of decay.
Pollard/Re-Pollard	The complete or partial removal of the crown of a young tree so as to encourage the development of numerous branches either for amenity or historically as fodder, repeated management is required cyclically to maintain the feature.
Resistograph	The Resistograph equipment is a drill-based tool using a stainless-steel drill bit that is approx. 1/16 inch in diameter and about 20 inches in length and is used to establish the strength of wood, without the need for destructive testing. As the subject tree is drilled, sound wood being denser than decayed wood offers greater resistance to the drill bit as it passes through the wood. This resistance is recorded electronically across the radius of the section being tested. The depth of drilling is dependent on the drill length and dimension of the tree part



being tested. The measurement depth is recorded in centimetres while the amplitude (resistance) reading is given as a percentage across a range of 0 to 100%. The readings allow the Arboriculturalist to assess the internal condition of the subject tree.

Root collar	The basal area of the tree; transition zone from trunk to root. Also sometimes called trunk flare.
Scaffold limbs / scaffold branches	The branches that form the main network framework of the crown of a tree.
Sever ivy and re-inspect	Cut or sever a band of ivy from ground level to a defined height, usually 1.5m above ground level to allow for the inspection and reporting of the base of the tree. Severing ivy also allows the ivy above to die back over a period of time to facilitate future inspections.
Slime Flux	Relating to a toxic condition from the spreading of bacteria or their products from a source of infection: characterised by malodorous gases, or salt deposits upon the bark. Should these enter the sap stream, localised vessel necrosis can result.
Soft rot	A kind of wood decay, where a fungi degrades cellulose within the cell wall, without causing overall degradation.
Sooty Bark Disease	Cryptostroma corticale (Sooty bark disease) is a species of fungus that causes sooty bark disease of maples, particularly sycamore (<i>Acer pseudoplatanus</i>). The spores grow in large amounts under the bark of affected trees or stacked allergenic and cause a debilitating pneumonitis (inflammation of the lungs) in humans.
Stag-head/heading	The outer branches of a tree that have died and now tend to protrude beyond the present extent of the crown.
Subsidence	In relation to vegetation, the removal of water by plant growth resulting in localised shrinkage in the soil volume.
Suppressed	Trees which are dominated by surrounding vegetation and whose crown development is restricted from above.
Tight Union / Tight Crotch	A crotch with a narrow angle between branches, often having included bark.
Tree Preservation Order	An order made by the local planning authority, where consent must be gained before undertaking all but exempt works to a tree.
Visual Tree Assessment (VTA)	An assessment of the mechanical condition of trees based upon their 'body language'. Trees are dynamic and respond to faults / decay / environmental factors in various ways, these responses can be indicative of structural integrity.



Wetwood

An infection caused by bacteria living inside the plant tissues. The bacteria ferment the plant fluids, resulting in death of nearby cells, and often causing exudations of fluid from the bark, often referred to as a Slime Flux.

White Rot

A type of wood decay where fungi attacks the lignin within the wood matrix.



12. Appendices 2 & 3:

- **Tree Schedule – Priority Works**
- **Tree Location Plan**




Appendix 1: Tree Schedule

Feature Type / Tree Code	Tree Seq.no	Store code & name/Location	Tree Location within site	Tree tag number	Geo-location Data			Site features	Tree species (Common Name)	No. of stems	Tree Dimensions			Tree defects	Condition	Recommendations	Priority	Date of inspection	Date of next inspection
					O/S Grid Reference	Latitude - Longitude	What3Words				Height (m) (Approx.)	Crown spread (m) (Approx.)	Stem diameter at breast height (cm) (measured)						
Grp/458296	G1	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Whole site coverage	No tag found	472103-139217	51.1475161 - 0.9702525	recap.segregate.albums	* Public access: low	Mix Broad (Mixed Broadleaves)	20	5.0m	3.0m	10cm	* Typical of species and age - Young sycamore and horse chestnut trees	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458072	1	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472102-139219	51.1476981 - 0.9705771	hindered.forgives.foremost	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	19.0m	11.0m	55cm	* Basal and trunk suckers - Restricting VTA * Ivy or climbing plants - Main stem * Major dead wood >50mm * Minor dead wood <50mm	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458076	2	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472107-139220	51.1477090 - 0.9705088	wildfires.unroll.hockey	* Public access: high * Soil - Ivy covered ground	Acer pseudoplatanus (Sycamore)	2	18.0m	9.0m	65cm	* Asymmetrical crown * Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Leaning tree * Minor dead wood <50mm * Codominant stems	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458068	4	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472113-139217	51.1476852 - 0.9704308	driving.worms.amplified	* Public access: high * Soil - Ivy covered ground * Traffic management required for proposed tree works	Acer pseudoplatanus (Sycamore)	1	16.0m	10.0m	65cm	* Crown - Other Considerations - Slender tree left exposed after removal of companion trees * Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem - Arising obstructing base * Minor dead wood <50mm	Fair	* Reduce height by 2m	High Priority	29/05/2026	May 2029
Sgl/458088	8	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472119-139220	51.1477120 - 0.9703420	repeating.ambushed.grants	* Public access: high * Soil - Ivy covered ground * Traffic management required for proposed tree works	Acer pseudoplatanus (Sycamore)	1	19.0m	8.0m	50cm	* Crown - Other Considerations - Slender tree left exposed after removal of companion trees * Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Minor dead wood <50mm	Fair	* Reduce height by 2m	High Priority	29/05/2026	May 2029
Sgl/458108	11	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472132-139223	51.1477328 - 0.9701592	overts.nicknames.crusaders	* Public access: high * Soil - Ivy covered ground * Traffic management required for proposed tree works	Acer pseudoplatanus (Sycamore)	1	19.0m	10.0m	60cm	* Asymmetrical crown * Crown - Other Considerations - Slender tree left exposed after removal of companion trees * Ivy or climbing plants - Main stem * Ivy restricting full inspection - Crown * Minor dead wood <50mm	Fair	* Reduce height by 2m	High Priority	29/05/2026	May 2029
Sgl/458116	13	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472136-139225	51.1477542 - 0.9700898	largent.grudging.machine	* Public access: high * Soil - Ivy covered ground * Traffic management required for proposed tree works	Acer pseudoplatanus (Sycamore)	1	19.0m	10.0m	60cm	* Asymmetrical crown * Crown - Other Considerations - Slender tree left exposed after removal of companion trees * Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Minor dead wood <50mm	Fair	* Reduce height by 2m	High Priority	29/05/2026	May 2029
Sgl/458124	15	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472140-139217	51.1476818 - 0.9700416	twitches.plunger.owns	* Public access: high * Soil - Ivy covered ground	Aesculus hippocastanum (Horse Chestnut)	1	20.0m	10.0m	70cm	* Basal and trunk suckers * Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458132	16	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472145-139212	51.1476339 - 0.9699642	treatable.universes.ladders	* Public access: low - Tree located on steep bank and within falling distance of highway * Soil - Ivy covered ground	Aesculus hippocastanum (Horse Chestnut)	1	20.0m	13.0m	80cm	* Cavity - Road facing, some cavitation, full examination restricted by nesting birds * Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Narrow forks with included bark * Possible wildlife - Nesting birds @3m agl restricting inspection	Fair	* No work required	No action required	29/05/2026	November 2026
Sgl/458128	17	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk Street	No tag found	472147-139219	51.1476957 - 0.9699331	belts.magma.pushover	* Public access: high * Soil - Ivy covered ground	Taxus baccata (Common Yew)	1	14.0m	8.0m	30cm	* Ivy or climbing plants - Main stem * Low branches	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458136	18	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 10 Spicers	No tag found	472155-139204	51.1475571 - 0.9698332	accented.jogged.zone	* Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Aesculus hippocastanum (Horse Chestnut)	1	14.0m	10.0m	80cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem	Fair	* Sever Ivy to 1.5m agl reporting all structural defects - Sever Ivy at ground level and remove Ivy from stem upto 1.5m above ground level	High Priority	29/05/2026	May 2029
Sgl/458140	19	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 10 Spicers	No tag found	472151-139194	51.1474703 - 0.9698936	freezing.take.juicy	* No access to view base of tree * Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Fraxinus excelsior (Common Ash)	1	14.0m	10.0m	80cm	* Ash Dieback - Health class 2: 51%-75% remaining canopy - Some improvement since previous inspection * Leaning tree * Major dead wood >50mm * Minor dead wood <50mm	Poor	* No work required	No action required	29/05/2026	May 2029
Sgl/458144	20	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 10 Spicers	No tag found	472152-139195	51.1474750 - 0.9698682	freezing.take.juicy	* Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Acer pseudoplatanus (Sycamore)	1	8.0m	5.0m	35cm	* Ivy or climbing plants - Main stem * Minor dead wood <50mm	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458148	21	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 10 Spicers	No tag found	472150-139192	51.1474522 - 0.9699002	freezing.take.juicy	* Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Acer pseudoplatanus (Sycamore)	1	8.0m	5.0m	35cm	* Ivy or climbing plants - Main stem * Minor dead wood <50mm	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458152	22	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 10 Spicers	No tag found	472149-139186	51.1474024 - 0.9699196	piglets.gracing.paves	* No access to view base of tree * Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Taxus baccata (Common Yew)	1	8.0m	5.0m	35cm	* Die back whole crown * Ivy or climbing plants - Main stem * Leaning tree * Minor dead wood <50mm	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458156	23	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 6 Spicers	No tag found	472151-139182	51.1476368 - 0.9698907	purchaser.crumble.outbursts	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	20.0m	11.0m	70cm	* Basal and trunk suckers - Restricting VTA * Dense crown - Dense crown restricting VTA * Minor dead wood <50mm * Regrown pollard or lopped tree	Fair	* Basal/Epicormic growth removal	High Priority	29/05/2026	May 2029
Sgl/458160	24	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 6 Spicers	No tag found	472150-139180	51.1473403 - 0.9699061	absorbing.strongman.newlyweds	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	20.0m	11.0m	70cm	* Basal and trunk suckers - Restricting VTA * Dense crown - Dense crown restricting VTA * Minor dead wood <50mm * Regrown pollard or lopped tree	Fair	* Basal/Epicormic growth removal	High Priority	29/05/2026	May 2029
Sgl/458164	25	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 14 Vaughans	No tag found	472145-139175	51.1473024 - 0.9699707	salmon.snow.work	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	20.0m	11.0m	60cm	* Basal and trunk suckers - Restricting VTA * Dense crown - Dense crown restricting VTA * Minor dead wood <50mm * Regrown pollard or lopped tree	Fair	* Basal/Epicormic growth removal * Sever Ivy to 1.5m agl reporting all structural defects - Sever Ivy at ground level and remove Ivy from stem upto 1.5m agl	High Priority	29/05/2026	May 2029
Sgl/458168	26	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 14 Vaughans	No tag found	472141-139173	51.1472799 - 0.9700314	node.eyeful.collides	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	20.0m	11.0m	60cm	* Basal and trunk suckers - Restricting VTA * Dense crown - Dense crown restricting VTA * Minor dead wood <50mm * Regrown pollard or lopped tree	Fair	* Basal/Epicormic growth removal * Sever Ivy to 1.5m agl reporting all structural defects - Sever Ivy at ground level and remove Ivy from stem upto 1.5m agl	High Priority	29/05/2026	May 2029

Sgl/458172	27	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 14 Vaughans	No tag found	472137-139170	S1.1472573 - 0.9700887	flopping.prefer.putts	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	20.0m	11.0m	60cm	* Basal and trunk suckers - Restricting VTA * Dense crown - Dense crown restricting VTA * Minor dead wood <50mm * Regrown pollard or topped tree	Fair	* Basal/Epicormic growth removal * Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 1.5m agl	High Priority	29/05/2026	May 2029
Sgl/458184	28	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 14 Vaughans	No tag found	472134-139168	S1.1472386 - 0.9701414	hiring.defensive.behind	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	20.0m	11.0m	60cm	* Basal and trunk suckers - Restricting VTA * Bark wound over 20% of stem * Dense crown - Dense crown restricting VTA * Minor dead wood <50mm * Regrown pollard or topped tree	Fair	* Basal/Epicormic growth removal * Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 1.5m agl	High Priority	29/05/2026	May 2029
Sgl/458176	29	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 14 Vaughans	No tag found	472129-139166	S1.1472183 - 0.9702012	dairy.tactical.culling	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	20.0m	11.0m	60cm	* Basal and trunk suckers - Restricting VTA * Dense crown - Dense crown restricting VTA * Minor dead wood <50mm * Regrown pollard or topped tree	Fair	* Basal/Epicormic growth removal * Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 1.5m agl	High Priority	29/05/2026	May 2029
Sgl/458180	30	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 14 Vaughans	No tag found	472127-139163	S1.1471989 - 0.9702418	notched.radiates.pipeline	* No access to view base of tree * Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	20.0m	11.0m	60cm	* Basal and trunk suckers - Restricting VTA * Dense crown - Dense crown restricting VTA * Minor dead wood <50mm * Regrown pollard or topped tree	Fair	* Basal/Epicormic growth removal * Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 1.5m agl	High Priority	29/05/2026	May 2029
Sgl/458188	31	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 10 Spicers	No tag found	472142-139182	S1.1473621 - 0.9700164	hunches.emotional.offers	* Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Aesculus hippocastanum (Horse Chestnut)	1	14.0m	6.0m	40cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458192	32	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 14 Vaughans	No tag found	472132-139173	S1.1472871 - 0.9701569	messy.prom.wells	* No access to view base of tree * Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Aesculus hippocastanum (Horse Chestnut)	1	17.0m	10.0m	70cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Tear out wound - Major, at approx. 12m agl. Not visible signs of decay	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458196	33	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent footpath steps leading from Lower Turk St	No tag found	472123-139167	S1.1472333 - 0.9702925	hike.notch.jingles	* Public access: high * Soil - Ivy covered ground. Steep bank	Aesculus hippocastanum (Horse Chestnut)	1	12.0m	5.0m	30cm	* Ivy or climbing plants - Main stem	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458248	36	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent footpath steps leading from Lower Turk St	No tag found	472123-139171	S1.1472685 - 0.9702943	indicates.leafing.gourmet	* Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	12.0m	5.0m	30cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem	Fair	* Basal/Epicormic growth removal * Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 1.5m agl	High Priority	29/05/2026	May 2029
Sgl/458256	37	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent footpath steps leading from Lower Turk St	No tag found	472119-139180	S1.1473518 - 0.9703439	positives.cools.spearhead	* Public access: high * Soil - Ivy covered ground. Steep bank restricting inspection on side opposite path	Acer pseudoplatanus (Sycamore)	1	19.0m	12.0m	70cm	* Asymmetrical crown - Gaps left from felling of companion trees * Ivy or climbing plants - Main stem * Minor dead wood <50mm * Codominant stems	Fair	* Basal/Epicormic growth removal * Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 2m agl	High Priority	29/05/2026	May 2029
Sgl/458252	38	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent footpath steps leading from Lower Turk St	No tag found	472120-139182	S1.1473682 - 0.9703314	positives.cools.spearhead	* Public access: high * Soil - Ivy covered ground. Steep bank restricting inspection	Aesculus hippocastanum (Horse Chestnut)	1	19.0m	10.0m	50cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Minor dead wood <50mm	Fair	* Basal/Epicormic growth removal * Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 1.5m agl	High Priority	29/05/2026	May 2029
Sgl/458260	39	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent footpath steps leading from Lower Turk St	No tag found	472116-139187	S1.1474126 - 0.9703959	offstage.available.nods	* Public access: high * Soil - Ivy covered ground, steep bank.	Acer pseudoplatanus (Sycamore)	1	19.0m	10.0m	80cm	* Ivy or climbing plants - Main stem * Major dead wood >50mm * Minor dead wood <50mm * Codominant stems	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458264	40	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent footpath steps leading from Lower Turk St	No tag found	472111-139196	S1.1474917 - 0.9704596	deleting.keen.mirror	* Public access: high * Soil - Ivy covered ground	Acer pseudoplatanus (Sycamore)	1	19.0m	10.0m	80cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Major dead wood >50mm * Minor dead wood <50mm * Codominant stems * Trunk defect - Inoculation @2m agl	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458272	42	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent footpath steps leading from Lower Turk St	No tag found	472105-139209	S1.1476077 - 0.9705459	covenants.haggle.backyards	* Public access: high * Soil - Ivy covered ground	Acer pseudoplatanus (Sycamore)	1	19.0m	10.0m	90cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Minor dead wood <50mm * Codominant stems	Fair	* Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 2m agl	High Priority	29/05/2026	May 2029
Sgl/458276	43	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent footpath steps leading from Lower Turk St	No tag found	472107-139205	S1.1475730 - 0.9705197	hockey.incurs.fills	* Public access: high * Soil - Ivy covered ground	Tilia x europaea (Common Lime)	1	19.0m	10.0m	90cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem * Minor dead wood <50mm	Fair	* Sever ivy to 1.5m agl reporting all structural defects - Sever ivy at ground level and remove ivy from stem upto 2m agl	High Priority	29/05/2026	May 2029
Sgl/458284	45	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Rear of 10 Spicers	No tag found	472139-139188	S1.1474218 - 0.9700553	flick.worm.install	* Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Aesculus hippocastanum (Horse Chestnut)	1	20.0m	12.0m	70cm	* Ivy or climbing plants - Main stem * Ivy restricting full inspection - Main stem	Fair	* Sever ivy to 1.5m agl reporting all structural defects	High Priority	29/05/2026	May 2029
Sgl/458288	46	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk St	No tag found	472132-139199	S1.1475154 - 0.9701580	yourself.baseballs.woodstove	* Public access: high * Soil - Ivy covered ground	Acer pseudoplatanus (Sycamore)	1	4.0m	0.9m	40cm	* Main Stem/Trunk - Other considerations - Failed at approximately 4m above ground level	Fair	* No work required	No action required	29/05/2026	May 2029
Sgl/458292	47	Rear of 5 Stillions Cl, Alton GU34 2RX - Land adj Lower Turk Street -	Adjacent Lower Turk St	No tag found	472123-139201	S1.1475341 - 0.9702805	bubbles.riverside.consults	* Public access: low - Tree located on steep bank * Soil - Ivy covered ground	Aesculus hippocastanum (Horse Chestnut)	1	8.0m	2.0m	100cm	* Ivy restricting full inspection - Main stem * Regrown pollard or topped tree * Raised roots/buttressing * Tear out wound - Approximately 4m above ground level	Poor	* No work required	No action required	29/05/2026	May 2029

Priority	Priority Key (incl timescale) Colour		Timescale
No action required			No Timescale
Low Priority			24 Months
High Priority			12 Months
Urgent-Public safety			1 Month

Appendix 2: Tree Location Plans

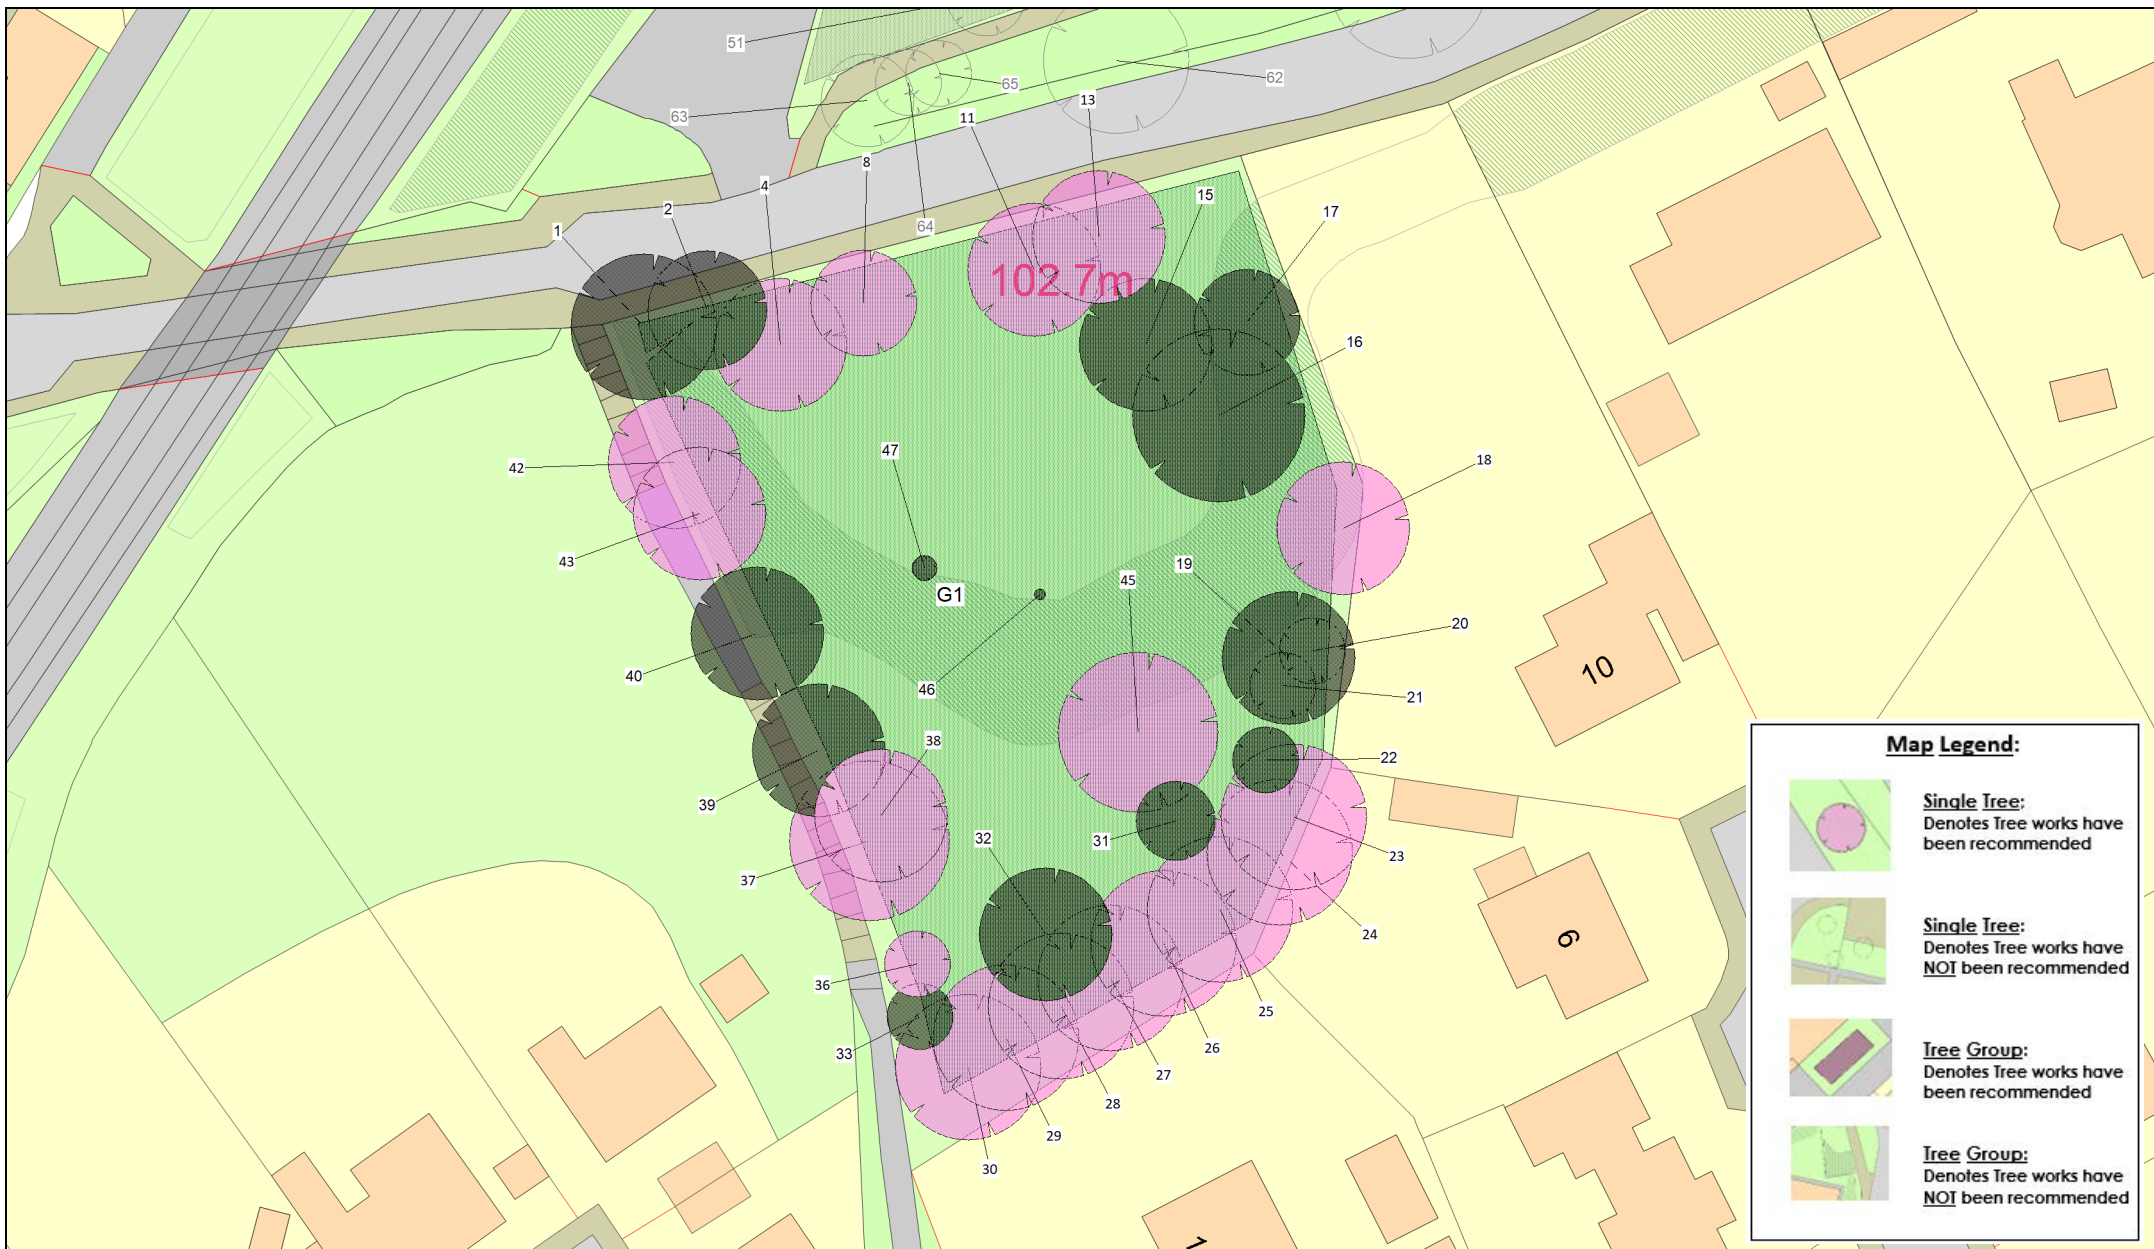



Simon Rogers
Head of Surveying – UK Wide
T: 0345 873 1500
E: simon.rogers@gristwoodandtoms.co.uk

Gristwood and Toms
Harris Lane, Shenley, Radlett
Hertfordshire, WD7 9EG

[www.nurture-group.co.uk/our-brands/
gristwood-and-toms/](http://www.nurture-group.co.uk/our-brands/gristwood-and-toms/)