100mm x 200mm x 1.5m sleepers on top of 100mm type-1

Hardcore

Handrail upright (75 x 125 x 2100mm)

5mm x 100mm decking screws at 6 per board

100mm x 50mm x 1.275m boards with a 10mm gap between each


38mm x 100mm x 4000mm handrail

Channel

Support posts attached with Timberlock screws

19mm x 150mm x 1830mm timber edging with 50mm x 50mm x 450mm stakes

Hardcore

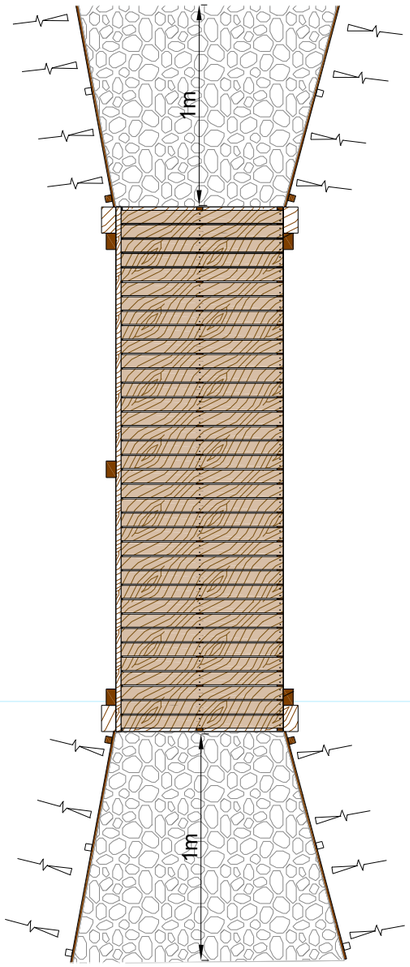

NOT TO SCALE

Planview demonstrating the length of the ramp

Drawing is to scale and appropriate for us, however will need specifying to the River Wey if this style is chosen to be taken forwards.

General notes:

1. All dimensions shown are in metres unless otherwise stated and levels in metres to ordnance datum.
2. Hardcore type to be confirmed by competent contractor.
3. All wood to be treated for longevity unless specified otherwise.
4. Heavy duty mesh to be metal and grade confirmed by competent contractor.

NOT FOR CONSTRUCTION

© Five Rivers Ltd all rights reserved 2026.

Ver.	Ver. Date	Status	Drawn	Check'd	Apprv'd
2	01/09/2026	FOR ISSUE	ENJ	XX	XX

FiveRivers
Hangar 5A
Thruxton Airfield
Andover
Hampshire
SP11 8PN
Tel: 01722 783041
www.five-rivers.com
Certificate Number 7071
ISO 9001
ISO 14001
ISO 45001

Client

Project
5080D - King's Pond

Title
Bridge Technical Detail - Planview 2

Drawing number
5R-5080D-306

Scale
1:20 @ A3