


1:200 close up of the proposed sediment trap.



Photo of installed silt trap by Five Rivers.

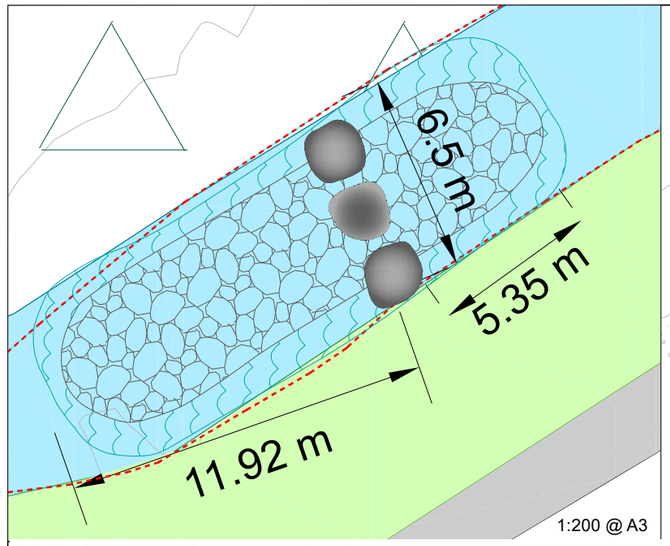

Key:

- Water
- Existing Road / Track
- Existing Vegetation
- Existing Island
- Existing Sluice Gate
- Contours (1 m)
- Existing Pond Outline
- Cross Sections Lines
- Proposed Wet Woodland
- Proposed Dead Hedge
- Proposed Picinic Benches / Seating
- Proposed Hibernaculum
- Proposed Benches
- Proposed Island / New Made Ground
- Proposed Willow Spiling / Berms
- Proposed Marginal Regrading
- Proposed Hardstanding Area
- Proposed Marginal Planting
- Proposed Large Wood
- Proposed In-channel Sediment Trap
- Proposed Addtional Pathways

General Notes:

1. All dimensions shown in metres unless otherwise stated and levels in metres to ordnance datum (mAOD).
2. Utility search undertaken in June 2026, and the ecological notes taken from the 27th November 2025 for the design phase of the project.
3. Relevant consent to be sought before the construction phase.
4. Construction works to be undertaken by a competent contractor with experience installing river and habitat restoration works.
5. Designs are semi-indicative. The exact location of proposed features should be determined onsite by a suitably qualified geomorphologist.
6. FiveRivers Environmental Contracting take no responsibility for the detrimental placement of in-channel features without appropriate supervision from a qualified geomorphologist.
7. Existing in-channel/marginal vegetation should be maintained wherever possible.

Design Assumptions:

1. Design is based on the assumption that the Defra LiDAR data is accurate and fit for purpose.
2. Design assumes there is appropriate access for required machinery to conduct necessary works.
3. Assumes no protected species on site.
4. Design assumes there are no hidden hard structures within the banks.
5. Design assumes site won material is suitable for use in channel.
6. Design assumes there is no negative impact on flood risk.

NOT FOR CONSTRUCTION

© Five Rivers Ltd all rights reserved 2026

Ver.	Ver. Date	Status	Drawn	Check'd	Apprv'd
4	09/10/2026	FOR ISSUE	AH	ENJ	JE

FiveRivers
East Farm
Codford
Wiltshire
BA12 0PG
Tel: 01722 783041
www.five-rivers.com
ISO 9001
ISO 14001
ISO 45001

Client
ALTON Town Council

Project
5080D - Kings Pond Phase 1

Title
Dredging Option - Engagement Overview

Drawing number
5R-5080D-107

Scale
1:1500 @ A3